




UFI.

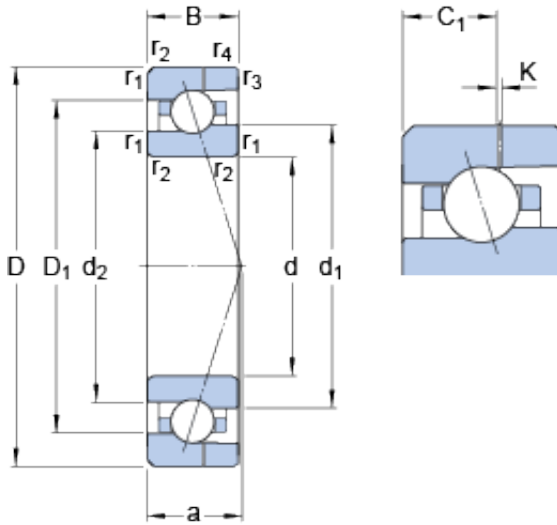

8 mm x 22 mm x 7 mm SKF 708
ACE/HCP4AH roulements à billes à contact
oblique

Bearing No. 708 ACE/HCP4AH

708 ACE/HCP4AH Bearing 2D drawings and 3D CAD
models

Size	22x8x7 mm
Bore Diameter	22 mm
Outer Diameter	8 mm
Width	7 mm
d	8 mm
D	22 mm
B	7 mm
d ₁	12.1 mm
d ₂	11.5 mm
D ₁	17.9 mm
K	0.5 mm
C ₁	4.25 mm
r _{1,2} - min.	0.3 mm
r _{3,4} - min.	0.15 mm
a	7.1 mm
d _a - min.	10 mm
d _b - min.	10 mm
D _a - max.	20 mm
D _b - max.	20.6 mm
r _a - max.	0.3 mm
r _b - max.	0.15 mm
d _n	13.3 mm
Basic dynamic load rating - C	2.3 kN



UFI.

Basic static load rating - C_0	0.765 kN
Fatigue load limit - P_u	0.032 kN
Limiting speed for grease lubrication	115000 r/min
Limiting speed for oil lubrication	180000 mm/min
Ball - D_w	3.969 mm
Ball - z	8
G_{ref}	0.17 cm ³
Calculation factor - e	0.68
Calculation factor - Y_2	0.87
Calculation factor - Y_0	0.38
Calculation factor - X_2	0.41
Calculation factor - Y_1	0.92
Calculation factor - Y_2	1.41
Calculation factor - Y_0	0.76
Calculation factor - X_2	0.67
Preload class A - G_A	20 N
Preload class B - G_B	60 N
Preload class C - G_C	120 N
Calculation factor - f	1.02
Calculation factor - f_1	0.99
Calculation factor - f_{2A}	1
Calculation factor - f_{2B}	1.03
Calculation factor - f_{2C}	1.06
Calculation factor - f_{HC}	1.01
Preload class A	26 N/micron
Preload class B	38 N/micron
Preload class C	50 N/micron
d_1	12.1 mm



UFI.

d_2	11.5 mm
D_1	17.9 mm
C_1	4.25 mm
$r_{1,2}$ min.	0.3 mm
$r_{3,4}$ min.	0.15 mm
d_a min.	10 mm
d_b min.	10 mm
D_a max.	20 mm
D_b max.	20.6 mm
r_a max.	0.3 mm
r_b max.	0.15 mm
d_n	13.3 mm
Basic dynamic load rating C	2.29 kN
Basic static load rating C_0	0.765 kN
Fatigue load limit P_u	0.032 kN
Attainable speed for grease lubrication	115000 r/min
Attainable speed for oil-air lubrication	180000 r/min
Ball diameter D_w	3.969 mm
Number of balls z	8
Reference grease quantity G_{ref}	0.17 cm ³
Preload class A G_A	20 N
Static axial stiffness, preload class A	26 N/ μ m
Preload class B G_B	60 N
Static axial stiffness, preload class B	38 N/ μ m
Preload class C G_C	120 N
Static axial stiffness, preload class C	50 N/ μ m
Calculation factor f	1.02
Calculation factor f_1	0.99



UFI.

Calculation factor f_{2A}	1
Calculation factor f_{2B}	1.03
Calculation factor f_{2C}	1.06
Calculation factor f_{HC}	1.01
Calculation factor e	0.68
Calculation factor (single, tandem) Y_2	0.87
Calculation factor (single, tandem) Y_0	0.38
Calculation factor (single, tandem) X_2	0.41
Calculation factor (back-to-back, face-to-face) Y_1	0.92
Calculation factor (back-to-back, face-to-face) Y_2	1.41
Calculation factor (back-to-back, face-to-face) Y_0	0.76
Calculation factor (back-to-back, face-to-face) X_2	0.67
Mass bearing	0.011 kg